



1/2" Nylon Tubing
1/2" OD x 3/8" ID Tubing
Sold in 30m roll. Working Pressure 150 PSI
Temperature Range: -40°C to +82°C
Our nylon tubing is lightweight, corrosion/abrasion resistant and extremely durable. Compressor oils have no effect on its performance.

90500 Master Kit

- (1) 20100 30m Tubing and Cutter
- (2) 90120 Aluminum Outlet Block
- (1) 90220 Aluminum Manifold Block
- (6) 50100 3/8 NPT Straight
- (4) 50300 Union Elbow
- (2) 50120 Hand Valve
- (2) 50125 1/4 NPT Brass Nipple
- (2) 50130 1/4 NPT Brass 45 Degree
- (3) 50135 3/8 NPT Brass Plug



Enhance your Master Kit with these RapidAir accessories:



90100
Outlet Kit
AIR Chucks not included



90200
Manifold Kit



50300
Elbow



20100
30m Tubing Kit



20200
Tubing Clips



50400
NPT Elbow



50100
NPT



50200
Tee



50500
Union



RAPIDAIR
SYSTEMS
THE COMPRESSED AIR SPECIALISTS

Rapidair Systems
Burpengary East, QLD, Australia
0450 566 440
www.rapidairsystems.com.au



Compressed Air Piping System



**Air Anywhere.
Easy to Install.
Economical.**

RapidAir is a complete compressed air distribution system that is designed to easily install beneath walls of new construction, or on wall surfaces of existing workshops.

Air Anywhere

No more dragging the compressor behind you and untangling the air hose and electrical cords. Reduce shop clutter and have constant compressed air instantly, anywhere.

Economical

An alternative to black or copper pipe installations, the modular design makes it less expensive to install than the traditional methods. With the RapidAir system there is no interior pipe corrosion, which results in longer tool life.

Easy to Install


The RapidAir system includes professional quality Rapid Fittings, air distribution manifolds, air outlets, and nylon tubing. The system is engineered to maintain 150 psi.

Install it yourself...
you can easily disassemble and re-modify your system. There are no special tools required to make your workspace more efficient and professional looking.



RapidAir Fittings

RapidAir fittings are designed to make installation fast and easy. Simply push the tubing firmly into the fitting until seated. If removal is desired, push evenly on release button and pull tubing out of fitting.

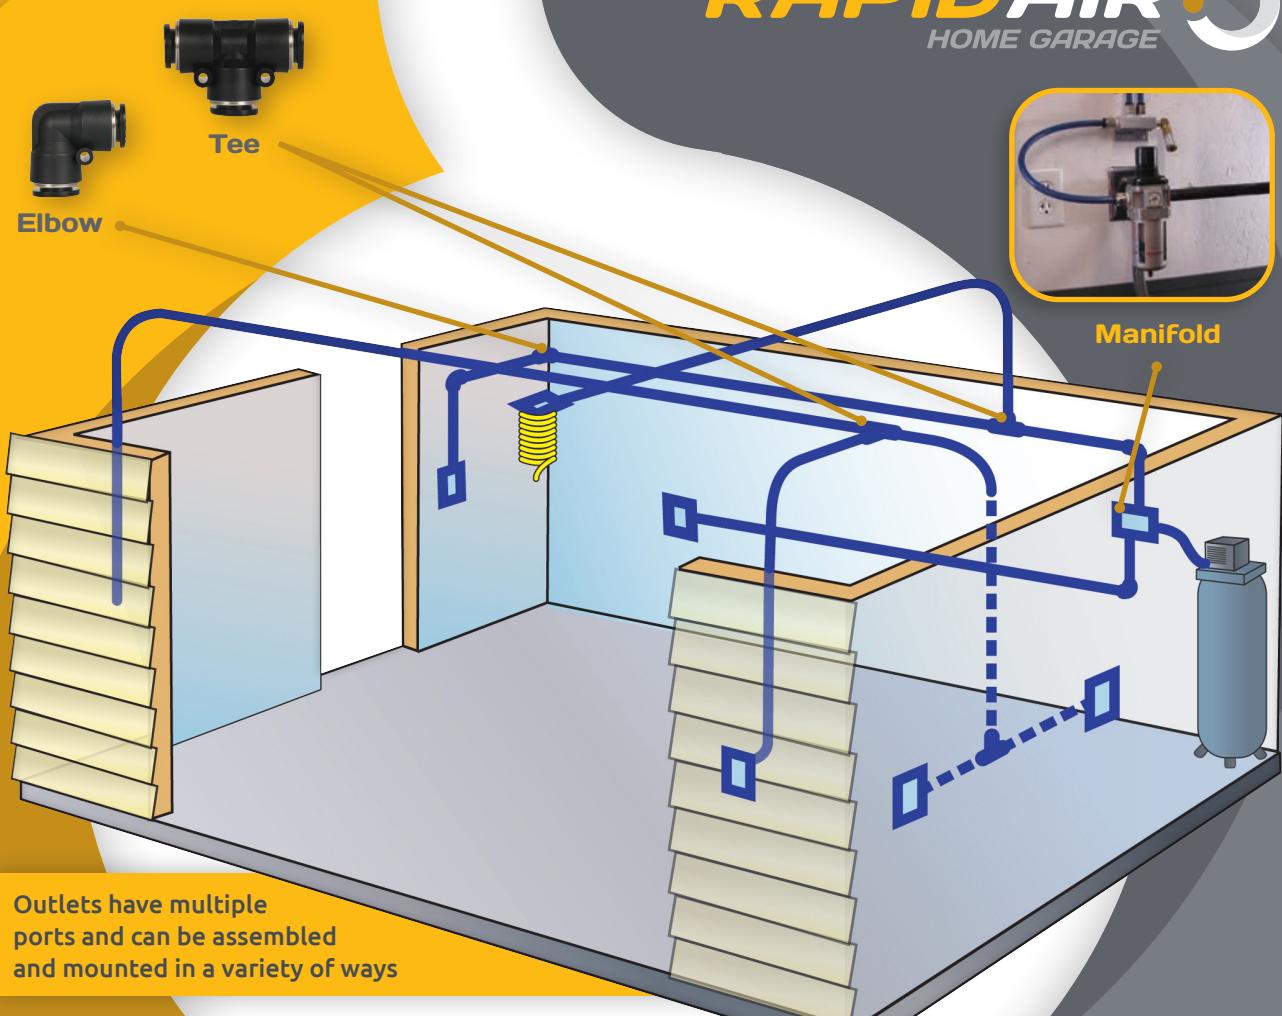

Surface Mount
Air line is mounted to wall



Hidden Mount
Air line is inside wall



Exterior Mount
Air outlet is mounted outdoors



Ceiling Mount
Air outlet is mounted on ceiling

RAPIDAIR®
HOME GARAGE